

# access

LIGHTING

## Read & Save these Instructions Halogen Flush Mounts Installation & Operation Instructions

### (1) TOOLS AND MATERIALS REQUIRED

BLADE SCREW DRIVER  
ADJUSTABLE WRENCH  
STEP LADDER  
WIRE CUTTERS  
WIRING SUPPLIES AS REQUIRED BY ELECTRICAL CODE

### CAUTION:

Before assembling your Lighting fixture. Please read the instructions. If you feel you do not have electrical wiring experience, refer to do it yourself wiring handbook or have your fixture installed by a qualified licensed electrician.

### (2) GENERAL

1. To ensure the success of the installation, be sure to read these Instructions and review the diagrams thoroughly before beginning.
2. All electrical connections must be in accordance with local codes, Ordinances, or the National Electrical Code. If you are unfamiliar with methods of installing electrical wiring, Secure the services of a qualified licensed electrician.
3. Those fixtures are intended to be mounted to a 4" x 2 1/4" deep metal octagon outlet box. The box must be directly supported by the building structure.
4. Before starting the installation, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.

### (3) UNPACK THE FIXTURE

CHECK THE CONTENTS OF THE BOX. YOU SHOULD RECEIVE:

- \* MOUNTING HARDWARE PACKAGE
- \* GLASS DIFFUSERS (NOT SUPPLIED ON ALL MODELS)
- \* FIXTURE ASSEMBLY

### (4) PREPARE THE FIXTURE

NOTE: FIRST TURN OFF ELECTRICITY

Refer to figure 1 for illustration of fixture parts and assembly.

1. If you are replacing an existing fixture disconnect and remove the old fixture. Expose the supply wires from the outlet box.
2. Attach supplied threaded rods (b) to the cross bar. Utilizing the supplied nuts. Fasten cross bar to outlet box using supplied screws (a).

3. ELECTRICAL CONNECTION : Connect the white wire from the fixture to the white wire of the supply circuit and the black wire from the fixture to the black wire of the supply circuit. Use UL approved wire connectors and make sure that there are no loose stands of wires. Secure wire connector with UL approved electrical tape. Fix the ground wire to the outlet box ground terminal (or to the outlet box ground wire).

4. Slide fixture base over long threaded screws (b) and secure with supplied nuts (c) & (d). Tighten firmly.


5. Insert halogen bulb between sockets. Do not Touch The Halogen Bulb With Bare Hands. Use A Soft Dry Cloth. Fit supplied halogen tempered glass cover.

6. Fit glass diffuser to fixture base by inserting glass into two (2) clips and then securing with spring loaded clip.

7. Restore electricity and check operation of your new lighting fixture.

### CAUTION :

Do Not Use Lamps Exceeding Maximum Wattage. As Per Caution Label.

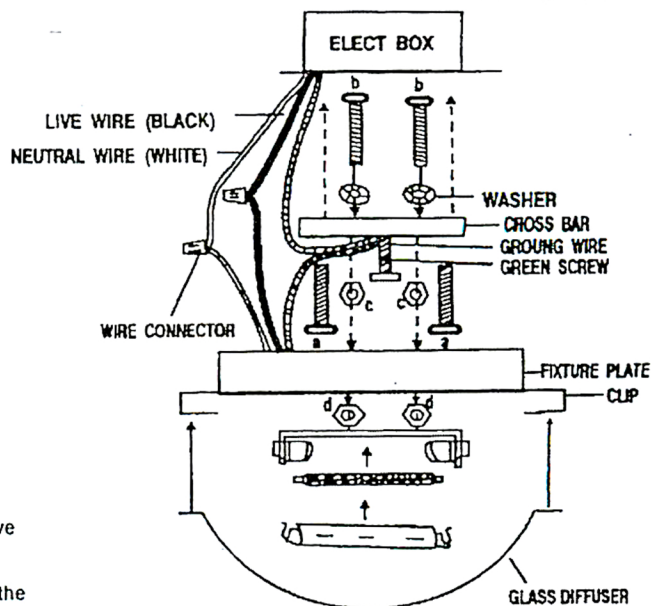

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT & THE HAZARDS INVOLVED. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.