

# One-Light LED Flush Mount

 Ceiling mounted • Damp location listed **PROGRESS LED**


## P350020-009-30

### Description:

One-light 11-3/8 inch Square LED Flush Mount featuring a square Alabaster glass bowl in a Brushed Nickel finish. Fixtures are dimmable to 10 percent with Triac or ELV dimmers. 3000K and 90CRI.

### Specifications:

- Brushed Nickel (-009) (plated)
- Steel Construction
- Etched Alabaster glass diffuser
- LED Module is replaceable (part # 93074252)
- 3000K color temperature, 90+ CRI
- 2015 lumens 80 lumens/watt (source).
- Dimmable to 10% brightness (See Dimming Notes)
- Unit covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

### Performance:

Number of Modules	1
Input Power	25w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	2015/80 (LM-82)
Lumens/LPW (Delivered)	1302/52.9 (LM-79)
CCT	3000 K
CRI	90+
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	5 year warranty
Labels	cCSAus Damp location listed ENERGY STAR® qualified Meets California Title 24 JA8-2016

### Images:



### Dimensions:

Square: 11-3/8"  
Height: 5"

Glass  
Width: 11-3/8"  
Length: 11-3/8"  
Height: 4-1/2"

## Photometrics:

## P350020-009-30

<b>ELECTRICAL DATA</b>	<b>P350020-009-30</b>
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.208 A
Input Power	25
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*

\*See Dimming Notes for more information

### P350020-009-30


LED Light Engine: 3000 K 90+  
 System Wattage: 25  
 Fixture delivered lumens: 1302  
 Fixture Efficacy: 52.9  
 Spacing Criteria: 1.31

### CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	294	
5	293	28
15	284	80
25	268	124
35	245	153
45	216	166
55	180	161
65	143	141
75	105	111
85	72	79
90	58	
95	48	53
105	33	35
115	23	23
125	18	16
135	15	12
145	13	8
155	11	5
165	0	0
175	0	0
180	0	

### ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	232	19.4
0-40	386	32.2
0-60	713	59.5
0-90	1045	87.2
90-120	111	9.3
90-130	127	10.6
90-150	148	12.3
90-180	153	12.8
0-180	1198	100.0

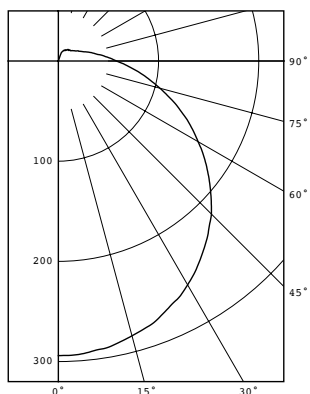

Test 17.00297 Test Date 02/01/17

**P350020-009-30****Dimming Notes:**

---

P350020 is designed to be compatible with many Triac/Forward Phase or ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

**Dimming Controls**

---

Lutron Diva DVELV-300P

Lutron Nova T NTELV-300

Lutron Caseta

Lutron Ariadni AY-600P

Lutron Lumea LG-603PG

Leviton SureSlide 6672

Leviton SureSlide 6674

Lutron Ariadni AYCL-153P

Lutron Skylark Contour CTCL-153P

Lutron Diva DVCL-153P

Cooper Devine AL DAL06P

Lutron Maestro MACL-153M

Lutron Ariadni AYL-600P

Lutron Maestro MA-600

Lutron NOVA T NTLV-600

lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Lutron Nova N-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.