

access

L I G H T I N G

INSTALLATION INSTRUCTIONS

IMPORTANT

Before assembling your access lighting fixture, please make sure that you carefully read through these instruction sheets. Consider having your fixture installed by a qualified licensed electrician.


NOTE: The important safeguards and instructions that appear in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that can't be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.

GENERAL INFORMATION

All electrical connections must be in accordance with all ordinances, Local and National Electrical Codes. These fixtures are intended for mounting to a standard 4" x 2 1/2" metal octagon outlet box. The box must be directly supported by the building structure and U.L. Recognized.

STEP BY STEP INSTRUCTIONS

Before starting your installation disconnect the Power by turning off the Circuit Breaker or by removing the fuse at the fuse box. Just turning the light off at the light switch is not sufficient to prevent electrical shock.

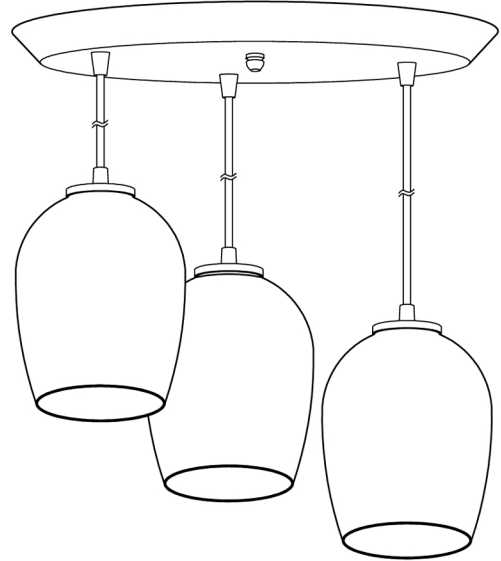


COLLECTION	APPLICATION	MODEL NO.
Quadra	Ceiling Fixture	52230

WHAT WE PROVIDE

- Crossbar
- Mounting Hardware
- Fixture
- 3 x Glass Shade

WHAT YOU NEED

- Screwdriver
- Wire Cutters
- Wiring Supplies as Specified by Electrical Code
- 3x60w E-26 A-19 Bulbs

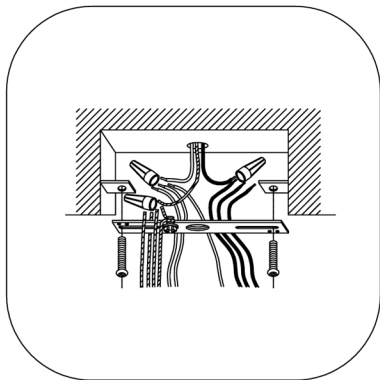

1

MOUNT CROSSBAR


If there is an existing fixture remove it. Expose the supply wires from the j-box. Mount the supplied crossbar to the J-Box.



2

CONNECT THE WIRES


Gently pull the supply wires. Connect the black (or brown) fixture wire to the black supply wire and the white (or blue) fixture wire to the white supply wire. Connect the fixture ground wire to the ground wire from the J-Box. Secure all connections with the supplied wire connectors and U.L listed electrical tape (not supplied). Tuck all wires carefully into the J-Box.



3

MOUNT THE CANOPY


Insert the nipple into the central hole of the crossbar, and adjust to suitable length. Fasten the Hex nut against the Crossbar so that the nipple will not rotate further. Position the Canopy against the ceiling, make the nipple pass through the center hole of the Canopy, then secure the Canopy against the ceiling by screwing the Decorative cap onto the nipple.



4

ATTACH THE GLASS SHADE

Install the shade on to fixture as figure shows.




5

INSERT THE BULB

Insert the bulb.

MAXIMUM WATTAGE 18W.

DO NOT EXCEED THE RECOMMENDED WATTAGE AS STATED ON THE WARNING LABEL AND INSTRUCTION SHEETS.



6

RESTORE THE ELECTRICITY AND CHECK THE

OPERATION OF YOUR NEW ACCESS FIXTURE

